



MacBook Pro 15" Core 2 Duo Model A1211 RAM Replacement

Written By: iRobot



INTRODUCTION

Accessing the RAM is easy.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)



PARTS:


- [PC2-5300 1 GB RAM Chip](#) (1)
- [PC2-5300 2 GB RAM Chip](#) (1)
- [PC2-5300 512 MB RAM Chip](#) (1)

Step 1 — Battery



- Use your fingers to push both battery release tabs away from the battery, and lift the battery out of the computer.

Step 2 — RAM Shield

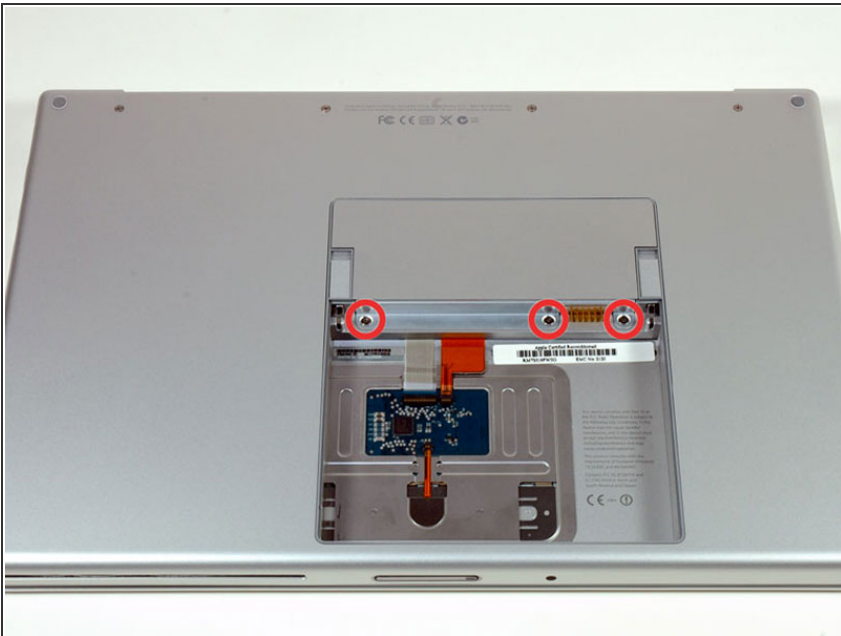

- Remove the three identical Phillips screws from the memory door.

Step 3



- Lift the memory door up enough to get a grip on it, and slide it toward you, pulling it away from the casing.

Step 4 — RAM



- Release the tabs on each side of the RAM chip at the same time. These tabs lock the chip in place and releasing them will cause the chip to "pop" up.

Step 5



- Pull the chip directly out from its connector.
- ⓘ If there are two RAM chips installed, repeat the above procedure for the second chip.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-26 04:59:49 AM.